

Dual-Cure E-MAX 903-E Light/Moisture-Cure Conformal Coating

APPLICATIONS

- **Conformal Coating**

FEATURES

- **UV/Visible Light Cure**
- **Secondary Moisture Cure**
- **Solvent Free**
- **Very Low VOCs**
- **Low Odor**
- **One Part, No Mixing Required**

OTHER FEATURES

- **Bright Blue Fluorescing**
- **Chemically Resistant**
- **MIL-I-46058C**
- **IPC-CC-830B**
- **UL 94 V-0**
- **UL 746-E**

Dymax Dual-Cure E-MAX 903-E is a light- and moisture-cure conformal coating specifically formulated to ensure complete cure for coating that flows underneath components on printed circuit boards. Coating in shadowed areas cures over time with ambient moisture. This coating fluoresces a vivid blue when exposed to UV light (365 nm) for easy inspection of coating coverage. Dymax E-MAX 903-E is engineered for coating thicknesses up to 0.127 mm [0.005 in]. Dymax Dual-Cure materials contain no nonreactive solvents. Their ability to cure in seconds enables faster processing, greater output, and lower processing costs. When cured with Dymax light-curing spot lamps, focused-beam lamps, or flood lamps, they deliver optimum speed and performance for conformal coating. Dymax lamps offer the ideal balance of UV and visible light for the fastest, deepest cures. This product is in full compliance with the RoHS2 directives 2015/863/EU and 2011/65/EU..

UNCURED PROPERTIES * *

Property	Value	Test Method
Solvent Content	No Nonreactive Solvents	N/A
Chemical Class	Acrylated Urethane	N/A
Appearance	Colorless/Light Amber Liquid	N/A
Soluble in	Organic Solvents	N/A
Density, g/ml	1.07	ASTM D1875
Viscosity, cP (20 rpm)	125 (nominal)	ASTM D2556

ELECTRICAL PROPERTIES * *

Property	Value	Test Method
Dielectric Constant (1 MHz)	3.90	ASTM D-150
Dissipation Factor (1 MHz)	0.01	ASTM D-150
Dielectric Withstand Voltage, V	>1,500	MIL-I-46058C
Volume Resistivity, ohm-cm	1.01 x 10 ¹⁶	ASTM D-257
Surface Resistivity, ohm	3.92 x 10 ¹⁵	ASTM D-257

CURED MECHANICAL PROPERTIES * *

Property	Value	Test Method
Durometer Hardness	D75	ASTM D2240
	D65 ^Ω	ASTM D2240
Tensile at Break, MPa [psi]	11 [1,600]	ASTM D638
Elongation at Break, %	60	ASTM D638
Modulus of Elasticity, MPa [psi]	150 [21,800]	ASTM D638
Glass Transition T _g , °C	56	DSTM 256 [‡]
CTE _{α1} , μm/m/°C	74	ASTM E831
CTE _{α2} , μm/m/°C	210	ASTM E831

ADHESION

Substrate	Recommendation
Leadframe	✓
Ceramic	✓
PCB	✓
Flex	-
Silicon	o

✓ Recommended o Limited Applications
st Requires Surface Treatment (e.g. plasma, corona treatment, etc.)

OTHER CURED PROPERTIES * *

Property	Value	Test Method
Boiling Water Absorption, % (2 h)	1.4	ASTM D570
Water Absorption, % (25°C, 24 h)	0.2	ASTM D570
Linear Shrinkage, %	1.6	ASTM D2566

* Not Specifications
N/A Not Applicable
¥ Measured after UV cure followed by 10 days at 25°C / 75% RH
Ω Measured after UV only cure
‡ DSTM Refers to Dymax Standard Test Method



© 2011-2017 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website at www.dymax.com/pdf/Conditions_of_Sale.pdf. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this communication shall act as a representation that the product use or application will not infringe on a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data in this communication as a general guideline.

Dymax Corporation
860.482.1010 | info@dyamax.com
www.dymax.com

Dymax Korea LLC
+82.2.784.3434 | info_kr@dyamax.com
www.dymax.com/kr

Dymax Oligomers & Coatings
860.626.7006 | oligomers&coatings@dyamax.com
www.dymax-oc.com

Dymax Europe GmbH
+49 (0) 611.962.7900 | info_de@dyamax.com
www.dymax.de

Dymax UV Adhesives & Equipment (Shanghai) Co Ltd
+86.21.37285759 | dymaxasia@dyamax.com
www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shenzhen) Co Ltd
+86.755.83485759 | dymaxasia@dyamax.com
www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038 | dymaxasia@dyamax.com
www.dymax.com.cn

Dymax Asia Pacific Pte. Ltd.
+65.6752.2887 | info_ap@dyamax.com
www.dymax-ap.com

CURING GUIDELINES

Light Cure

UV-curing guidelines for E-MAX 903-E at 3 mil thickness:

Dymax Curing System (Intensity)	Cure Time or Belt Speed
5000-EC (225 mW/cm ²) ^A	40 s
UVCS Conveyor with Fusion D lamp (2.5 W/cm ²) ^B	1.5 m/min [5 ft/min]
UVCS Conveyor with one 5000-EC (250 mW/cm ²) ^B	0.3 m/min [1 ft/min]
BlueWave [®] 200 (10 W/cm ²) ^A	5 s

A Intensity was measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL[™] 50 Radiometer

B Intensity was measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL[™] 150 Radiometer.

Full cure is best determined empirically by curing at different times and intensities, and measuring the corresponding change in cured properties such as tackiness, adhesion, hardness, etc. Full cure is defined as the point at which more light exposure no longer improves cured properties. Higher intensities or longer cures (up to 5x) generally will not degrade Dymax light-curable materials.



Dymax recommends that customers employ a safety factor by curing longer and/or at higher intensities than required for full cure. Although Dymax Application Engineering can provide technical support and assist with process development, each customer ultimately must determine and qualify the appropriate curing parameters required for their unique application.

Moisture Cure

Moisture is used as a secondary cure mechanism for shadowed areas that cannot be cured with light. While moisture cure time is typically 2-3 days at 25°C [77°F], 50% RH, actual moisture cure time is application specific and may vary. Cure time depends on humidity level, amount of coating in shadowed areas, and proximity of shadowed coating to humidity. Coating entrapped under large components may have a prolonged cure time. Exposure to heat (typically 65°C-80°C) and higher relative humidity will accelerate cure. Accelerated moisture cure time is also dependent on the variables listed above.

DEPTH OF CURE

The graphs below show the increase in depth of cure as a function of exposure time with two different lamps at different intensities. A 9.5 mm [0.37 in] diameter specimen was cured in a polypropylene mold and cooled to room temperature. It was then released from the mold and the cure depth was measured.

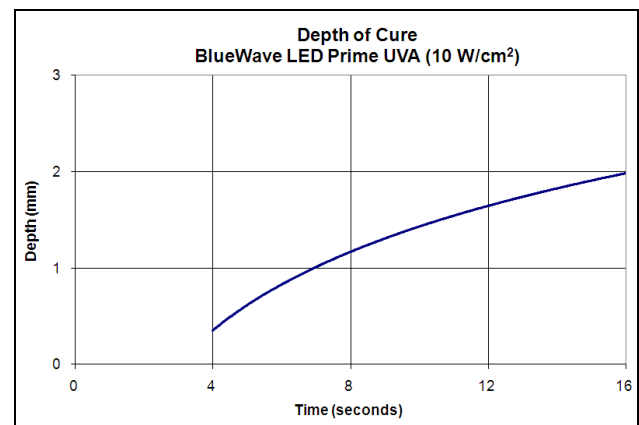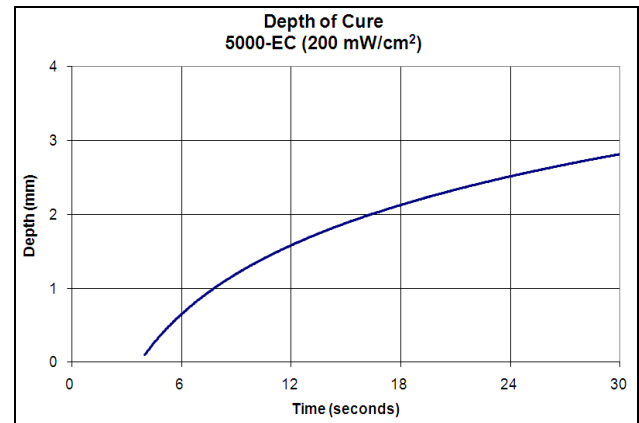

OPTIMIZING PERFORMANCE AND HANDLING

1. This product cures with exposure to UV and visible light. Exposure to ambient and artificial light should be kept to a minimum before curing. Dispensing components including needles and fluid lines should be 100% light blocking, not just UV blocking.
2. All surfaces in contact with the material should be clean and free from flux residue, grease, mold release, or other contaminants prior to dispensing the material.
3. Cure speed is dependent upon many variables, including lamp intensity, distance from the light source, required depth of cure, coating thickness and amount of material in shadowed areas.
4. Oxygen in the atmosphere may inhibit surface cure. Surfaces exposed to air may require high-intensity ($>100 \text{ mW/cm}^2$) UV light to produce a dry surface cure. Flooding the curing area with an inert gas, such as nitrogen, can also reduce the effects of oxygen inhibition.
5. Parts should be allowed to cool after cure before testing and subjecting to any loads or electrical testing.
6. In rare cases, stress cracking may occur in assembled parts. Three options may be explored to eliminate this problem. One option is to heat anneal the parts to remove molded-in stresses. A second option is to open any gap between mating parts to reduce stress caused by an interference fit. The third option is to minimize the amount of time the liquid material remains in contact with the substrate(s) prior to curing.
7. Light curing generally produces some heat. If necessary, cooling fans can be placed in the curing area to reduce the heating effect on components.
8. At the point of curing, an air exhaust system is recommended to dissipate any heat and vapors formed during the curing process.
9. Resealing opened containers under nitrogen extends shelf life.

DISPENSING THE MATERIAL

This material may be dispensed with a variety of manual, semi-automated and fully automated fluid delivery systems. Dymax has several dispensing systems that may be suitable for use with conformal coating materials such as our model 110 mountable atomizing needle valve or SG-100-RS handheld spray gun. Small area applications including beads and small dots can be achieved using hand-held dispensers such as our SD-100 syringe dispenser and our Model 400 needle valve systems. These valve systems can be used in a manual, semi-automated or fully automated application. Questions relating to and defining the best fluid delivery system and curing equipment for specific applications should be discussed with the Dymax Application Engineering Team.

CLEANUP

Uncured material may be removed from dispensing components and parts with non-alcoholic solvents, like Butyl Acetate. Cured material will be impervious to many solvents and difficult to remove. Cleanup of cured material may require mechanical methods of removal.

PERFORMANCE AFTER TEMPERATURE EXPOSURE

Light-cured Dymax materials typically have a lower thermal limit of -54°C [-65°F] and an upper limit of 150°C [300°F]. Many Dymax products can withstand temperatures outside of this range for short periods of time, including typical wave solder processes and reflow profiles. Please contact Dymax Application Engineering for assistance.

STORAGE AND SHELF LIFE

Store the material in a cool, dark place when not in use. Do not expose to light. This product may polymerize upon prolonged exposure to ambient and artificial light as well as atmospheric moisture. Keep container covered when not in use. Resealing the container under nitrogen or other inert gas extends shelf life. This material has a 10-month shelf life from date of shipment, unless otherwise specified, when stored between 10°C [50°F] and 32°C [90°F] in the original, unopened container.

GENERAL INFORMATION

This product is intended for industrial use only. Keep out of the reach of children. Avoid breathing vapors. Avoid contact with skin, eyes, and clothing. Wear impervious gloves. Repeated or continuous skin contact with uncured material may cause irritation. Remove material from skin with soap and water. Never use organic solvents to remove material from skin and eyes. For more information on the safe handling of this material, please refer to the Material Safety Data Sheet before use.